



Marine Boat Trailer and 4x4 Wheel Bearing Grease, 396 Grams

No. 73312 | Item# 1006200 | Case# 1006199

Product Description	A blue tacky, aluminum complex grease using a highly refined base oil. It has been formulated with a polymer to provide adhesive, non-blend and water wash-out characteristics. Will resist water under the most severe water conditions.
Applications	Anti-friction bearings, blocks, boat trailer bearings, deck equipment, marine equipment, shaft log seals, sleeve bearings, slides, steering cables, steering dockside machinery, steering quadrants, turnbuckles, wheel bearings, winches
Unit Package Description	14 Ounce (414 ml) Cartridge
Brand	CRC
Generic Description 1	Marine Grease for Boat Trailer
Net Fill	396 Grams
UPC Code	078254733128
Unit Dimensions	23.65H x 5.41W x 5.41D cm
Units Per Case	10
Case Dimensions	24.13H x 11.43W x 28.9D cm
Cases Per Pallet	150
Case Weight	4.99 kg
I 2 of 5 Code	30078254733129
Appearance	Blue Semi-Solid to Solid Grease
Base Type	Aluminum Complex
Flash point (F)	>450°F
Flash point (C)	>232.2°C
Flammability Class - CPSC	None
Spec Gravity Concentrate	0.9
NLGI Grade	2
Timken OK Load Lbs.	40 Lbs
Plastic Safe	Not Determined

Last revised: 3/6/2020

Page 1 of 2




Chemical Solutions to Keep You Moving™

f t y o i n • 800-272-8963 • crcindustries.com

CRC Industries, Inc. is a global leader in the production of specialty chemicals for maintenance, repair and operational professionals and do-it-yourselfers serving the automotive, industrial, electrical, marine, heavy truck, hardware and aviation markets. CRC trademarked brands include: CRC®, K&W®, Sta-Lube®, SmartWasher®, Marykate®, Weld-Aid®, Ambersil®, KF®, Kontakt Chemie®, Ados®, Action Can®, and Kitten®.

©2019 CRC Industries, Inc.

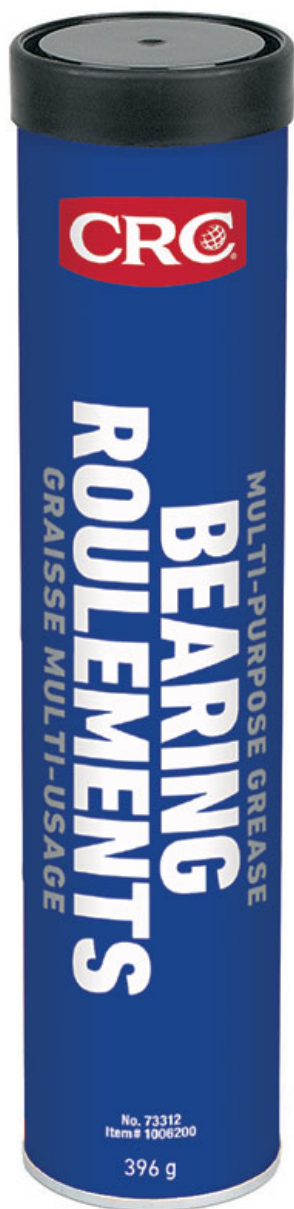

Evaporation Rate	Slow
Dielectric Strength	Not Determined
Working Temp (F)	0 to 450°F
Working Temp (C)	-17.8 to 232.2°C
4 Ball EP	Not Determined
4 Ball Wear	Not Determined
Drop Point	243°C
Elastomer Compatibility	Not Determined
Leakage	Not Determined
Low Temp Torque	Not Determined
Oil Separation	<10%
Oxidation Stability	Not Determined
Pour Point (F)	0°F
Pour Point (C)	-17.78°C
ISO Viscosity Grade	220
Water Washout	<15%
Worked Penetration	265 to 295
Propellant	None
DOT Proper Shipping Name	Not Regulated
Restricted from Sale In:	Not for sale in United States.
Removal (How To)	Remove with a degreaser or brake cleaner product.

Last revised: 3/6/2020
Page 2 of 2



Chemical Solutions to Keep You Moving™
f t y i n • 800-272-8963 • crcindustries.com

CRC Industries, Inc. is a global leader in the production of specialty chemicals for maintenance, repair and operational professionals and do-it-yourselfers serving the automotive, industrial, electrical, marine, heavy truck, hardware and aviation markets. CRC trademarked brands include: CRC®, K&W®, Sta-Lube®, SmartWasher®, Marykate®, Weld-Aid®, Ambersil®, KF®, Kontakt Chemie®, Ados®, Action Can®, and Kitten®.

©2019 CRC Industries, Inc.