

Driller Red Grease Extreme Pressure Lithium Complex Grease, 396 Grams

No. 73640 | Item# 1006212 | Case# 1006211

Product Description	Driller Red Grease is a NLGI #2 Red Grease which offer superior protection to lubricate a wide variety of severe duty drilling, industrial, mining and construction equipment. Timken load of 36 kg.
Applications	Drilling and Mining applications, backing plates, ball joints, chassis points, construction ball & roller bearings, idler bearings, industrial applications, pillow block bearings, sprocket bearings, U-joints, water pumps, wheel bearings
Unit Package Description	14 Ounce (414 ml) Cartridge
Brand	CRC
Generic Description 1	Extreme Pressure Lithium Complex Grease
Net Fill	396 Grams
UPC Code	078254736402
Unit Dimensions	23.65H x 5.41W x 5.41D cm
Units Per Case	10
Case Dimensions	24.13H x 11.43W x 28.9D cm
Cases Per Pallet	150
Case Weight	4.54 kg
I 2 of 5 Code	30072213736404
Appearance	Red, Smooth, Tacky
Base Type	Lithium Complex
Flash point (F)	302°F
Flash point (C)	150°C
Flammability Class - CPSC	None
Spec Gravity Concentrate	0.93
NLGI Grade	2
Timken OK Load Lbs.	80 Lbs
Plastic Safe	Yes
Evaporation Rate	Slow


Last revised: 3/6/2020
Page 1 of 2



Chemical Solutions to Keep You Moving™
f t y o i n • 800-272-8963 • crcindustries.com

CRC Industries, Inc. is a global leader in the production of specialty chemicals for maintenance, repair and operational professionals and do-it-yourselfers serving the automotive, industrial, electrical, marine, heavy truck, hardware and aviation markets. CRC trademarked brands include: CRC®, K&W®, Sta-Lube®, SmartWasher®, Marykate®, Weld-Aid®, Ambersil®, KF®, Kontakt Chemie®, Ados®, Action Can®, and Kitten®.

©2019 CRC Industries, Inc.

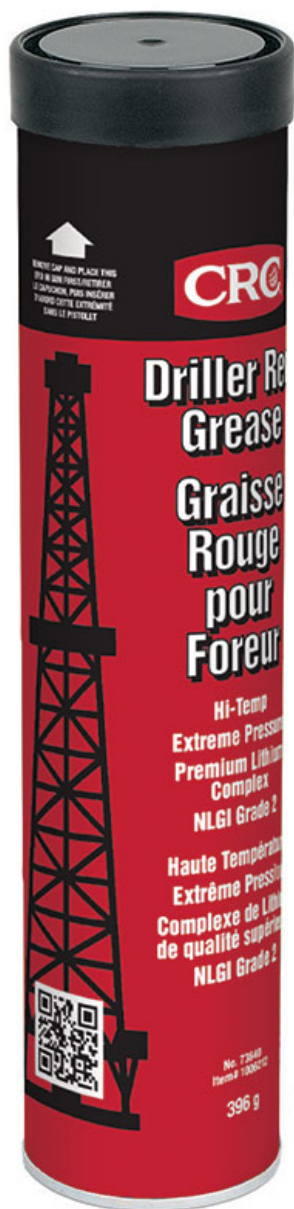

Dielectric Strength	Not Determined
Working Temp (F)	-10 to 400°F
Working Temp (C)	-23 to 204°C
4 Ball EP	315 Kgf
4 Ball Wear	0.45
Drop Point	288°C
Leakage	2
Low Temp Torque	Not Determined
Oil Separation	1
Oxidation Stability	Not Determined
Pour Point (F)	Not Determined
Pour Point (C)	Not Determined
Water Washout	2.5 at 79°C
Worked Penetration	265 to 295
Propellant	None
DOT Proper Shipping Name	Not Regulated
Restricted from Sale In:	Not for sale in United States.
Removal (How To)	Remove with a degreaser.

