

## New Generation™ Wheel Bearing Grease for Disc and Drum Brakes, 14 Wt Oz

No. SL3110 | Item# 1007852 | Case# 1007851

Product Description	A premium lithium complex NLGI grade 2 grease with drop point of over 500° F. This grease is designed for late model vehicles wheel bearings, chassis, suspension & u-joints. Wide temperature range -40°F to 325°F. Extreme pressure additives.
Applications	Automotive applications, ball joints, bearings, chassis points, construction ball & roller bearings, conveyor bearings, disc-brake systems, farm equipment, guides, mining applications, press rolls, roller bearings, slides, wheel bearings
Unit Package Description	14 Ounce Cartridge
Brand	Sta-Lube
Generic Description 1	Wheel Bearing Grease
Net Fill	14 Wt Oz
UPC Code	072213311006
Unit Dimensions	9.31H x 2.13W x 2.13D in
Units Per Case	10
Case Dimensions	9.5H x 4.5W x 11.38D in
Cases Per Pallet	150
Case Weight	11 lbs
I 2 of 5 Code	30072213311007
Appearance	Amber Semi-Solid to Solid Grease
Base Type	Lithium Complex
Flash point (F)	450°F
Flash point (C)	232.22°C
Flammability Class - CPSC	None
Spec Gravity Concentrate	0.9 at 60°F
NLGI Grade	2
Timken OK Load Lbs.	50 Lbs
Plastic Safe	Not Determined

Last revised: 4/23/2019

Page 1 of 2




**Chemical Solutions to Keep You Moving™**

f t y i n • 800-272-8963 • [crcindustries.com](http://crcindustries.com)

CRC Industries, Inc. is a global leader in the production of specialty chemicals for maintenance, repair and operational professionals and do-it-yourselfers serving the automotive, industrial, electrical, marine, heavy truck, hardware and aviation markets. CRC trademarked brands include: CRC®, K&W®, Sta-Lube®, SmartWasher®, Marykate®, Weld-Aid®, Ambersil®, KF®, Kontakt Chemie®, Ados®, Action Can®, and Kitten®.

©2019 CRC Industries, Inc.

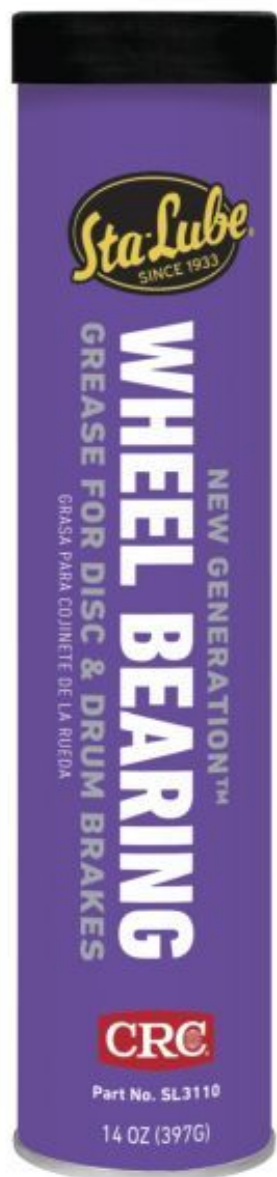

Evaporation Rate	<1 (butyl acetate=1)
Working Temp (F)	-40 to 325°F
Working Temp (C)	-40 to 163°C
4 Ball EP	45 LWI, 250 KG Weld
4 Ball Wear	0.6 mm
Drop Point	500°F
Leakage	6
Low Temp Torque	15.5 Max
Oil Separation	3.5
Oxidation Stability	5
Pour Point (F)	Not Determined
Pour Point (C)	Not Determined
ISO Viscosity Grade	150
Water Washout	7
Worked Penetration	265 to 295
Propellant	None
DOT Proper Shipping Name	Not Regulated
VOC % (Consumer Product def)	1
VOC g/L (Consumer Product def)	9
VOC lbs/gal (Consumer Prod def)	0.075
VOC Category	Not Regulated
Removal (How To)	Remove with a degreaser or brake cleaner product.

Last revised: 4/23/2019  
Page 2 of 2



**Chemical Solutions to Keep You Moving™**  
f t y d in • 800-272-8963 • [crcindustries.com](http://crcindustries.com)

CRC Industries, Inc. is a global leader in the production of specialty chemicals for maintenance, repair and operational professionals and do-it-yourselfers serving the automotive, industrial, electrical, marine, heavy truck, hardware and aviation markets. CRC trademarked brands include: CRC®, K&W®, Sta-Lube®, SmartWasher®, Marykate®, Weld-Aid®, Ambersil®, KF®, Kontakt Chemie®, Ados®, Action Can®, and Kitten®.

©2019 CRC Industries, Inc.