

## Lectra Lube™ Electric Motor Grease, 14 Wt Oz

No. SL3586 | Item# 1007936 | Case# 1007935

**Product Description** A premium long-life grease with excellent thermal

stability. This grease has excellent water resistance and will not washout. It maintains its consistency under severe

working conditions and resists oxidation.

"Sealed for Life" bearings and motors **Applications** 

Unit Package Description 14 Ounce Cartridge

**Brand CRC** 

Generic Description 1 Polyurea Thickened NLGI 2 Grease

Net Fill 14 Wt Oz

**UPC** Code 072213358605

**Unit Dimensions** 9.31H x 2.13W x 2.13D in

Units Per Case 10

Case Dimensions 9.5H x 4.5W x 11.38D in

Cases Per Pallet 150 Case Weight 11 lbs

I 2 of 5 Code 30072213358606

Blue Green Solid Grease **Appearance** 

Base Type Polyurea 400°F Flash point (F) Flash point (C) 204°C Flammability Class - CPSC None Spec Gravity Concentrate 0.87 **NLGI** Grade 2

Timken OK Load Lbs. 50 Lbs

Plastic Safe Not Determined

**Evaporation Rate** Slow


Working Temp (F) 0 to 400°F -18 to 204°C Working Temp (C) 4 Ball EP 400 Kg min

Last revised: 4/10/2018

Page 1 of 2





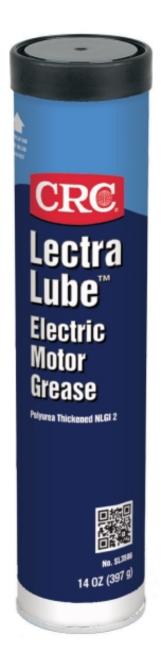

4 Ball Wear 0.65 mm

Drop Point 500°F

Water Washout 5% Max at 175°F

Worked Penetration 265
Propellant None

DOT Proper Shipping Name Not Regulated

VOC % (Consumer Product

def)

VOC g/L (Consumer 8.7

Product def)

VOC lbs/gal (Consumer 0.07

Prod def)

VOC Category Not Regulated

Removal (How To) Remove with a degreaser or brake cleaner product.

Last revised: 4/10/2018

Page 2 of 2

