



# PRODUCT DATA SHEET

All Purpose Enamel Spray Paint-Swift Red, 10 Wt Oz  
 No. 18000 | Item# 1005162 | Case# 1005161



Product Description	Remarkable versatile, general-purpose, quick dry, non-fading coating for use in exterior and interior applications. Recommended for general use in every day factory and contractor applications.
Color	Swift Red
Applications	Interior and exterior use on wood, metal, plaster, masonry, glass, pottery, wicker, paper and cloth.
Unit Package Description	16 Ounce Aerosol
Brand	CRC
Generic Description 1	All Purpose Enamel Spray Paint
Net Fill	10 Wt Oz
UPC Code	078254180007
Unit Dimensions	7.75H x 2.63W x 2.63D in
Units Per Case	6
Case Dimensions	8.68H x 5.62W x 11.31D in
Cases Per Pallet	170
Case Weight	6 lbs
I 2 of 5 Code	30078254180008
Appearance	Red Liquid
Flash point (F)	-2.2°F
Flash point (C)	-19&#176;C
Flammability Class - CPSC	Extremely Flammable
Spec Gravity Concentrate	0.77 to 0.85
Plastic Safe	Yes
Dry Time - Fully Dry	1 Hour
Dry Time - Tack Free	30 Minutes
Recoat	Before 1 Hour or After 72 Hours
Coverage	15 to 20 Sq Ft
Propellant	Hydrocarbon

Last revised: 3/27/2018  
 Page 1 of 2



Customer Care: 800-556-5074  
 Technical Assistance: 800-521-3168  
[www.crcindustries.com](http://www.crcindustries.com)

CRC Industries is a worldwide leader in the production of specialty chemicals for maintenance and repair professionals serving industrial, electrical, aviation, automotive and marine markets. CRC is ISO 9001:2008 certified and adheres to the strictest guidelines for quality in all facets of research, development and production.




CRC®, K&W®, Sta-Lube®, Marykate® and products denoted with ® and ™ are trademarks of CRC Industries, Inc.



# PRODUCT DATA SHEET



Aerosol Flammability Level	III
DOT Proper Shipping Name	Aerosols, Flammable, Limited Quantity
VOC % (Consumer Product def)	45.9
VOC g/L (Consumer Product def)	535
VOC lbs/gal (Consumer Prod def)	4.46
VOC Category	Aerosol Coating: Non-Flat Paint
MIR Limit (EPA)	1.4
MIR Limit (CA)	0.95
MIR Value	0.71
Removal (How To)	Remove: WET paint with mineral spirits or turpentine, DRY paint with lacquer thinner/stripper.

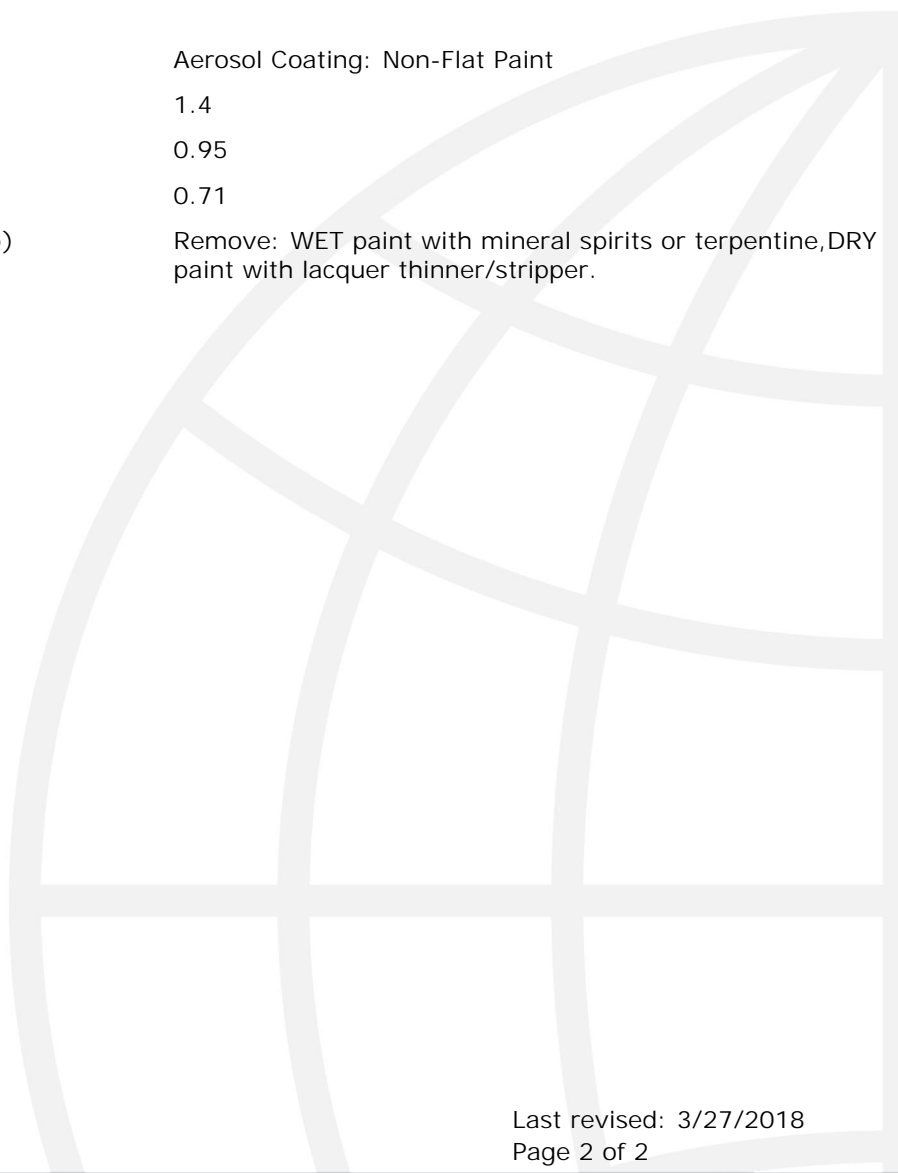

Last revised: 3/27/2018  
Page 2 of 2



Customer Care: 800-556-5074  
Technical Assistance: 800-521-3168  
www.crcindustries.com



CRC®, K&W®, Sta-Lube®, Marykate® and products denoted with ® and ™ are trademarks of CRC Industries, Inc.

CRC Industries is a worldwide leader in the production of specialty chemicals for maintenance and repair professionals serving industrial, electrical, aviation, automotive and marine markets. CRC is ISO 9001:2008 certified and adheres to the strictest guidelines for quality in all facets of research, development and production.