



Extreme Duty Food Grade Grease, 14 Wt Oz

No. SL35615 | Item# 1007931 | Case# 1007930

Product Description An NSF H1 registered, NLGI #2 high performance

lubricating grease used where incidental contact with food is a possibility. It also excels in applications where resistance to water washout and broad operating

temperatures are absolutely necessary.

Applications Food processing & handling equipment, breweries,

canneries, carton/packaging equipment, dairies, & meat

processing plants

Unit Package Description 14 Ounce Cartridge

Brand CRC

Generic Description 1 Extreme Duty Food Grade Grease

Net Fill 14 Wt Oz

UPC Code 072213356151

Unit Dimensions 9.25H x 2.2W x 2.2D in

Units Per Case 10

Case Dimensions 9.5H x 4.5W x 11.38D in

Cases Per Pallet 150
Case Weight 9 lbs

I 2 of 5 Code 30072213356152

Appearance Tan, Smooth Grease

Base Type Calcium Sulfonate

Flash point (F) 428°F Flash point (C) 220°C

Flammability Class - CPSC Combustible
Spec Gravity Concentrate 0.95 to 1.05

NLGI Grade 2

Timken OK Load Lbs. 65 Lbs
Plastic Safe Yes


Evaporation Rate Very Slow Working Temp (F) -4 to 351°F

Last revised: 7/30/2019

Page 1 of 2





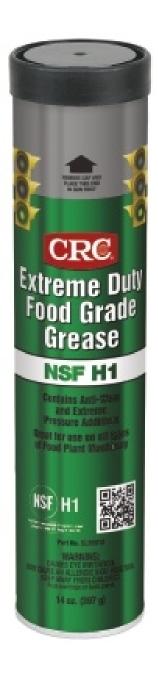

Working Temp (C) -20 to 177°C
4 Ball EP 620
4 Ball Wear 0.45 Max
Drop Point 572°F
Leakage 0.4
Low Temp Torque <5,000

Oil Separation 0.2

Oxidation Stability 1

Pour Point (F) -4°F

Pour Point (C) -20°C Water Washout 2.75

Worked Penetration 265 to 295

Propellant None
NSF Category Code H1

NSF Number 144236

DOT Proper Shipping Name Not Regulated

VOC % (Consumer Product C

def)

VOC g/L (Consumer 0 Product def)

VOC lbs/gal (Consumer 0

Prod def)

VOC Category Not Regulated

Removal (How To) Remove with a degreaser.

Last revised: 7/30/2019

Page 2 of 2

