


Extreme Duty Food Grade Grease, 14 Wt Oz

No. SL35615 | Item# 1007931 | Case# 1007930

Product Description	An NSF H1 registered, NLGI #2 high performance lubricating grease used where incidental contact with food is a possibility. It also excels in applications where resistance to water washout and broad operating temperatures are absolutely necessary.
Applications	Food processing & handling equipment, breweries, canneries, carton/packaging equipment, dairies, & meat processing plants
Unit Package Description	14 Ounce Cartridge
Brand	CRC
Generic Description 1	Extreme Duty Food Grade Grease
Net Fill	14 Wt Oz
UPC Code	072213356151
Unit Dimensions	9.25H x 2.2W x 2.2D in
Units Per Case	10
Case Dimensions	9.5H x 4.5W x 11.38D in
Cases Per Pallet	150
Case Weight	9 lbs
I 2 of 5 Code	30072213356152
Appearance	Tan, Smooth Grease
Base Type	Calcium Sulfonate
Flash point (F)	428°F
Flash point (C)	220°C
Flammability Class - CPSC	Combustible
Spec Gravity Concentrate	0.95 to 1.05
NLGI Grade	2
Timken OK Load Lbs.	65 Lbs
Plastic Safe	Yes
Evaporation Rate	Very Slow
Working Temp (F)	-4 to 351°F

Last revised: 7/30/2019
Page 1 of 2



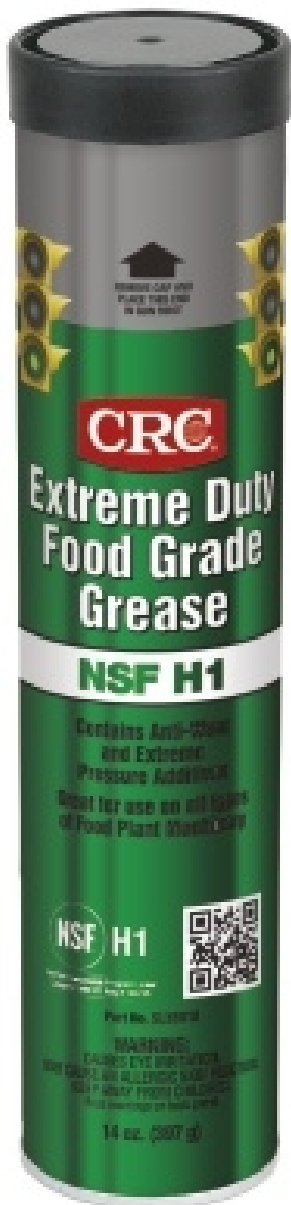

Working Temp (C)	-20 to 177°C
4 Ball EP	620
4 Ball Wear	0.45 Max
Drop Point	572°F
Leakage	0.4
Low Temp Torque	<5,000
Oil Separation	0.2
Oxidation Stability	1
Pour Point (F)	-4°F
Pour Point (C)	-20°C
Water Washout	2.75
Worked Penetration	265 to 295
Propellant	None
NSF Category Code	H1
NSF Number	144236
DOT Proper Shipping Name	Not Regulated
VOC % (Consumer Product def)	0
VOC g/L (Consumer Product def)	0
VOC lbs/gal (Consumer Prod def)	0
VOC Category	Not Regulated
Removal (How To)	Remove with a degreaser.

Last revised: 7/30/2019
Page 2 of 2

